







#### **OUR COMMITMENT**

For generations, Miller has stood for innovation, a dedication to our customers and a drive to make them more productive. Our factory teams, dealer network and all Miller employees remain guided by these basic principles.

The Nitro 5000 series embodies the best of our beliefs. Climb aboard and see for yourself. We think you'll understand why Miller people are proud to do what they do.



Step up... and into your new world of spraying.



# **COMFORT ZONE**



The crowning touch on a great Miller sprayer.

#### **TECHNOLOGY: ONLY THE BEGINNING**

You'll be immediately struck by the clean, uncluttered cab. But you'll quickly see that your productive world is at your fingertips, including the sophisticated control center which is surprisingly comprehensive yet easy to master.

The Miller Systems Monitor turns you into the master of your universe. From the reversing fan and electric rinse option pages to the foam marker and engine diagnostic pages (and many more), you'll track everything you need—without ever leaving your comfortable seat.



Your productive world is at your fingertips."



#### SIT BACK, RELAX, TAKE CHARGE

Combining comfort with control in the Miller Nitro 5000 cab was our goal: we wanted you to feel right at home. The hours you spend here—and we know they will be many—are not going to seem quite as grueling anymore.

The premium Spray View Cab features are almost too many to list, but for starters they include:

- Grammer Evolution suede leather seat —including active suspension and head rest. It's heated and vented, too.
- Leather-wrapped steering wheel
- Bluetooth XM Radio
- Auto climate system
- And much more

Both the standard SprayView Cab and the premium version feature sophisticated Air Ride suspension, an instructor's seat, charcoal cab filtration and more.

We built the new Nitro 5000 cab for a simple reason: to make the best front boom sprayer in the industry even better.

### **STANDING TALL**

Keeping you productive means letting you work as long as you need to—including late into the season. That's why the Nitro features a full six feet (1.8 meters) of ground clearance. And since your goal is minimum crop damage while spraying, clearance is critical, as are other Nitro features, such as its even weight distribution, outstanding traction and tight turning radius. So many variables factor into your productivity calculations. The Nitro tackles them all.



## **SEE YOUR WORLD** Without ever looking back.

### **SAVING YOUR NECK**

With the Nitro front boom, you can confidently see your work. Visibility and sight lines are so good you'll see every nozzle, from tip to tip. No guesswork or wondering if all is well, and no craning your neck to see what's happening behind you. By the end of your long days, you won't be feeling the worse for wear.



### Keeping you productive late into the season."



# **GET ABOVE IT ALL**

All-season productivity with a full 6 feet of clearance



#### **A WHOLE NEW ENVIRONMENT**

We know you've had plenty of days when you've felt like knocking off early—the pounding noise, the strain of looking over your shoulder, the constant stopping to check adjustments and levels—but the Nitro 5000, including the cab's creature comforts, are going to give you a whole new experience.

K Nitros are well-known for great visibility and surprising quiet. The 5000 takes it to an even higher level."

From your comfortable vantage point in the cab, you'll confidently see everything you need to.

The rear-mount engine isolates you from distracting noise, reducing your fatigue and allowing you to focus peacefully—on the work in front of you.



## **QUIET PLEASE**

Onboard, you'll be able to hear yourself think.

# **TURN ON A DIME**

4-wheel steer option—the ultimate in maneuverability





With 4-wheel steer option, you'll have the tightest turning radius in the business. With front and rear wheels following the same track, crop damage is minimized and headlands turning is a snap.





## **GAIN TRACTION** Stop spinning your wheels. And

minimize soil compaction, too.



3

Direct drive wheel motors means more power to the wheel, fewer parts and less wear.

Major components carefully placed, so weight distribution is within 4% of 50-50 balance during spraying.

## EASY RIDER

Award-winning suspension = smoothest field trip around

Min in Mary




### SUSPENSION IS ABOUT MORE THAN COMFORT

The Nitro is known for its great ride, but our HydraLink<sup>™</sup> system does so much more. It insures accurate spraying even at high speeds, less overall machine stress and better boom stability. The all-wheel suspension, connected in an X pattern, gives you a great ride in the toughest conditions, meaning you'll be covering more acres in a day—and your teeth won't be rattling at the end of it.

\* Tank Full Tank Half F \* Tank Empt Nitro 5240, 100' bo \* Fuel and Rinse Tanks Full, both 150 Gal.



|  | Front Axle | Rear Axle |  |  |  |
|--|------------|-----------|--|--|--|
|  | 46%        | 54%       |  |  |  |
|  | 48%        | 52%       |  |  |  |
|  | 52%        | 48%       |  |  |  |
| om, 1000 Gal. Tank<br>aks Full, both 150 Gal |            |           |  |  |  |

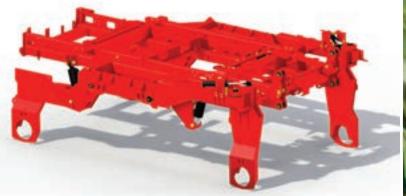

# **FLEXIBLE TO THE MAX**

#### NO MUSS, NO FUSS

Talk about maximum asset utilization.

Quickly remove the spray boom, pull up to your Miller Injection Toolbar or other attachment, hook it up and get back to work. Fast.







### HAVE IT YOUR WAY—FAST

How much can you do with a single sprayer? With the Nitro 5000, lots. With Miller Quick Attach, you can quickly swap out your spray boom for a Swather, Miller Injection Toolbar, or even an Oxbo™ corn detassler

## Maximum asset utilization "

The Quick Attach system gets right to the heart of your productivity, which means keeping your time getting ready for a new task to the absolute minimum.

The level of built-in productivity in the Nitro 5000 is, well, huge. But your individual needs are unique, and that's why we offer so many options to help you decide just how you want to work.

# **ALL ABOUT PRODUCTIVITY**

Time is money. The Nitro 5000 speeds you up.

| Nit            | tro Models 🗲     | 5215                      | 5240                                     | 5240                                     | 5275                                | 5275                                | 5333            | 5365            |
|----------------|------------------|---------------------------|--|--|-------------------------------------|-------------------------------------|-----------------|-----------------|
| Speed<br>Range | Wheel Motor Type | MS 13 Front MS 18<br>Rear | MW14 Front MS18 Rear<br>* <b>00 Cams</b> | MW14 Front MS18 Rear<br>* <b>02 Cams</b> | MS 18 Dyna Plus<br>* <b>00 Cams</b> | MS 18 Dyna Plus<br>* <b>02 Cams</b> | MS 18 Dyna Plus | MW24 Dyna Plus  |
| 1              | mph / km/h       | 0-13.8 / 0-22.2           | 0-13.1/0-21                              | 0-11.3 / 0-18.2                          | 0-14/0-22.5                         | 0-13.2 / 0-21.2                     | 0-15.1/0-24.3   | 0-10.1/0-16.3   |
| 2              | mph / km/h       | 0-17.6 / 0-28.3           | 0-15.4 / 0-24.8                          | 0-13 / 0-21                              | 0-19/0-30.5                         | 0-17.8 / 0-28.6                     | 0-20.1/0-32.3   | 0-13.2 / 0-21.2 |
| 3              | mph / km/h       | 0-27.2 / 0-43.8           | 0-18 / 0-29                              | 0-16.1/0-29                              | 0-29/0-46.6                         | 0-26.6 / 0-42.8                     | 0-30.1 / 0-48.3 | 0-19.1 / 0-30.7 |
| 4              | mph / km/h       | NA                        | 0-22.5 / 0-36.2                          | 0-19.9 / 0-32                            | NA                                  | NA                                  | NA              | 0-23.6 / 0-38   |
| 5              | mph / km/h       | NA                        | 0-29.2 / 0-47                            | 0-26.1/0-42                              | NA                                  | NA                                  | NA              | 0-31/0-49.9     |

\*02 Cams provide 20% more torque than 00 Cams

### GET IT DONE. YOUR WAY.

• A wide, full range of booms

• Choice of tank sizes, up to the largest capacity in the industry • Tread adjust: match your crop spacing requirements with ease • Turn night into day with the Nitro's deluxe lighting packages Best-in-class Spray Controls (details on next page)

### **COMMAND CENTRAL:**

Knowledge is power. And the intuitive, one-touch, easy-to-master Miller Systems Monitor gives you mastery over your machine by letting you keep tabs on everything you want to know.

 Electric Rinse Option Reversing Fan Page • Foam Marker Page Complete Engine Diagnostics • Speed displays for multiple inputs Customized service reminders Color screen, fully programmable





SCS 5000





## **RAVEN** Spray Controls



#### **SETTING THE STANDARD**

Raven controllers, simply said, have proven to be the benchmark for quality, reliability and performance.



#### SCS 5000

Simple, economic, reliable. A hallmark of proven Raven functionality



### **ENVIZIO AND ENVIZIO PRO II**

Super convenience and functionality. Easily navigate through color screens featuring mapping and data logging, spray controls and a full range of precision options. Envizio Pro controls SmarTrax, Autoboom, AccuBoom, chemical injection and more.



#### **VIPER PRO AND VIPER 4**

The ultimate in precision simplified. Wireless-ready computers with large color touch screens manages all your toughest and most demanding applications with ease. In addition to all the Raven Precision options, they're compatible with standard DGPS receivers. The Viper 4 features a new tablet style

interface with swiping features and horizontal or vertical orientation for the optimum in operator ease of use.

| Models >              |
|-----------------------|
| Specs 🔻               |
| SprayView Cab         |
| Premium SprayView     |
| Cummins® Engines      |
| Horsepower (kW) / I   |
| Fuel Tank             |
| Cooling System        |
| Transmission          |
| Auxiliary Hydraulic ( |
| UltraFlo Hydraulic P  |
| Speed Ranges          |
| Service Brake         |
| Park Brake            |
| Steering              |
| Standard 2 - Wheel    |
| Optional 4 - Wheel S  |
| Tread Width Adjustr   |
| HydraLink™ Suspen     |
| Ground Clearance      |
| Product Tank Optior   |
| Rinse System          |
| Product Pump Stan     |
| Product Pump Option   |
| Foam Marker Option    |
| Monobeam Boom C       |
| 120' / 36m Boom O     |
| Boom Travel           |
| Spray Controller Opt  |
| Wheelbase             |
| Dimensions (Shippi    |
|                       |
|                       |

|       | NITRO  | NITRO   | NITRO  | NITRO  | NITRO  |  |  |  |  |
|-------|--|---|--|--|--|--|--|--|--|
|       | 5215   | 5240  | 5275   | 5333   | 5365   |  |  |  |  |
|       | "Ultra Quiet" cab with air ride, p   | "Ultra Quiet" cab with air ride, pressurization, charcoal filtration, heat/AC, AM/FM/WX w/CD, 2 way tilt/telescope steering wheel, sun visor. Cloth air ride seat, with folding instructional seat. Chassis Monitoring System |  |  |  |  |  |  |  |
|       | All standard SprayView features PLUS Grammer Evolution suede leather seat with active suspension, heated and cooled. Leather wrap steering wheel, Auto Climate Control,<br>Bluetooth XM stereo with 4 speakers, lighted cup holder, deluxe dome lights, and foot rests |   |  |  |  |  |  |  |  |
|       |  | QSB 6.7 Liter Tier III*   |  | QSC 8.3 Liter Tier III*                            | QSL 8.9 Liter Tier III*                          |  |  |  |  |
| ower  | 215 (160) Option 240 (179) & 275 (205)   | 240 (179) Option 275 (205)  | 275 (205)  | 305 (227) / 333 (248)                              | 365 (272) / 375 (279)                            |  |  |  |  |
|       |  |   | 150 Gallon (568 L)                                   |  |  |  |  |  |  |
|       |  | Efficient Single Pas  | s "Side by Side" (not layered), hydraulically driven | fan with reverse option                            |  |  |  |  |  |
|       |  | Torq-Trac® h  | ydrostatic drive system with Twin Sauer Danfoss he   | eavy duty pumps                                    |  |  |  |  |  |
|       |  | Choose 31 GPM (117L/min) or 51 GPM (193L/min)   |  |  | Choose 26 GPM (98.4L/min) or 44 GPM (166.5L/min) |  |  |  |  |
| ption | Independe  | ent 48 Gallons Per Minute (182 L/min) with Powe   | r Beyond Kit   | Independent 42 Gallons F                           | Per Minute (159 L/min)                           |  |  |  |  |
|       | 3  | 5   | 3  | 3  | 5  |  |  |  |  |
|       | Hydrostatic  |   | 4 wheel dynamic intern                               | al wet disc and oil cooled                         |  |  |  |  |  |
|       | 2 wheel 2 wheel spring applied   |   |  |  |  |  |  |  |  |
|       |  | Hydrostatic with two steering cylinders. No tie rods.   |  |  |  |  |  |  |  |
|       | 13.5' (4.1m) radius  |   |  | 15' (4.5m) radius                                  |  |  |  |  |  |
|       | 13.5' (4.1m)   | radius optional   | 15' (4.5m) radius optional                           |  |  |  |  |  |  |
|       |  | 120" to 160" (305 to 406 cm) Center to Center, Hydraulic adjustment standard  |  |  |  |  |  |  |  |
|       |  | 4 wheel independent, full susper  | nsion travel of 20" (51cm), hydraulic leveling/shock | absorbers, auto leveling for each leg              |  |  |  |  |  |
|       |  |   | 72" (183 cm) varies with tire size                   |  |  |  |  |  |  |
|       | 1000 gallon (3785 L) poly or SS  | 1000 or 1200 gallon (3785 or 4542 L) poly<br>or SS  | 1200, 14   | 00, or 1600 gallon (4542, 5300, or 6056 L) Stainle | ss Steel   |  |  |  |  |
|       | Manual or optional electric in-cab controls, 150 gallons (568 L) poly tank and 2" QuickFill connection   |   |  |  |  |  |  |  |  |
|       | Hypro 9306C - 210 gpm @ 80psi (795 L/min @ 5.5 bar) capacity at the pump   |   |  |  |  |  |  |  |  |
|       | High capacity Hypro 9307C - 310 gpm @ 80psi (1,173 L/min @ 5.5 bar)  |   |  |  |  |  |  |  |  |
|       | Injection System - uses water from rinse tank - in-cab controls - 3 gallons (11.3 L) foam concentrate tank   |   |  |  |  |  |  |  |  |
|       | 60, 80/60, 90/60, 100/60 (27/18, 30/18, 32/18m) 80/60, 90/60, 100/60 (27/18, 30/18, 32/18m)  |   |  |  |  |  |  |  |  |
|       | NA   |   | 120/70   | (36/22m)   |  |  |  |  |  |
|       |  |   | From 22" (56cm) to 118" (300cm)                      |  |  |  |  |  |  |
|       |  |   | Raven <sup>®</sup> SCS 5000, Envizio Pro, Viper Pro  |  |  |  |  |  |  |
|       | 153"   | (389cm)   | 177" (450cm)   |  |  |  |  |  |  |
|       | H: 158" (401cm) / W: 145   | H: 158" (401cm) / W: 145" (368cm) / L: 338" (859cm) H: 158" (401cm) / W: 145" (368cm) / L: 363" (922cm)   |  |  |  |  |  |  |  |

\* Models with Tier III engine are not available in North America.

Some clearances and dimensions will vary with tire and boom sizes. Miller products are subject to continuous improvement, so changes are possible without notice. All descriptions and specifications in this brochure should be considered as approximate and may include optional equipment and attachments that are not part of the standard specifications. Please refer to your nearest Miller dealer for additional specifications as required. Copyright 2015.



Putting the name Miller on our products is more than a matter of simple pride. It's also our promise to you that we're

providing the best products we know how, and that commitment stretches through our whole organization, from our Miller factory team to field support. And it includes our Miller Dealers, too, who provide you with the parts, equipment and knowledge to truly make your Miller a Miller.



Miller Sprayers 511 E. Main St., St. Nazianz, WI 54232-0127 800-247-5557 / www.millerstn.com Miller is a CNH Industrial Brand

Models with Tier III Emission Engines, for Markets Outside North America.